

Datasheet

RLED45CC1

1-Channel Constant Current Dimmer


What is the RLED45CC1?

The RLED45CC1 is a Constant Current LED dimmer designed for controlling single Constant Current loads.

The output of the RLED45CC1 can be adjusted to match the load, ranging from 350mA to 1000mA.

The RLED45CC1 works with Rako wireless systems and can be integrated into a Wired system when within range of a WK-HUB.

Connections/Dimensions

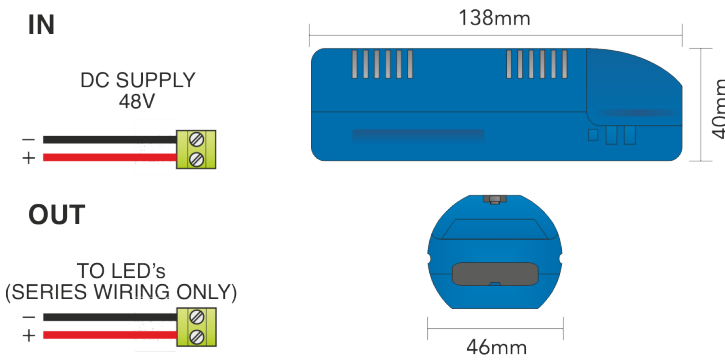

Technical Data

Dimensions	172x46x40mm
Input Supply	48V DC
Weight	177g
Housing	UL94-V0
Connections	4-way terminal for DC supply 2-way terminal for load
Climate Range	+2C to +40C Humidity +5% to 95% non-condensing
Load types	Constant current LED
Minimum Load	1W
Maximum Load	45W
Terminal Size	Solid - 4.0mm ² , Stranded - 2.5mm ²
Standards	RoHS UKCA, CE EN 60669-2-5:2016
Communication	FM radio, 433.9MHz

Installation and Setup

For information on installing and setting up the RLED45CC1 see the [RLED45CC1 Manual](#).



Document Version 2.0.0

telephone +44 (0) 1634 226666 | www.rakocontrols.com

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HERewith WITHOUT NOTICE.
© 2024 RAKO CONTROLS LIMITED