



Datasheet

RSR-DLI

Wireless DALI Controller



What is the RSR-DLI?

The RSR-DLI is used in a Rako Wireless network to interface with up to 64 DALI Ballasts, 15 groups can be created in a single Room.


When used with compatible DT6 or DT8 Ballasts, the RSR-DLI can be used for RGBW and colour-tunable control.

Once configured in Rasoft Pro, the RSR-DLI can store up to 16 Scenes of light levels which can be recalled via a Rako Keypad or any Rako Wireless transmitter.

Features

- 16 Scenes
- Controls up to 64 DALI ballasts
- Ballast grouping
- Single-channel colour control
- Single-channel temperature control

Connections/Dimensions

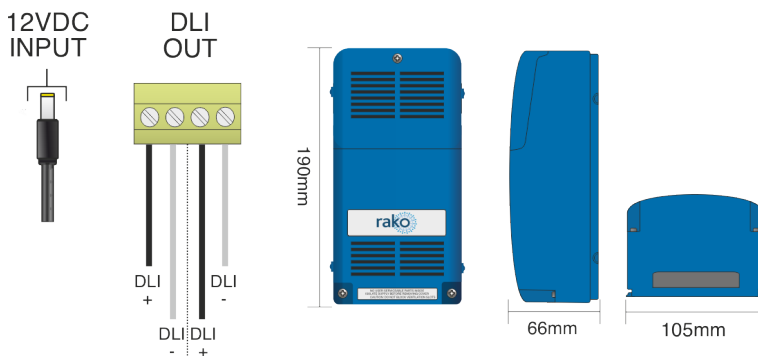

Technical Data

Dimensions	190x105x66mm
Input Supply	12V DC (PSU supplied)
Weight	340g
Housing	UL94-V0
Connections	4-way screw terminal
Climate Range	Temperature +2C to +40C Humidity +5% to 95% non-condensing
Load Types	DT6/DT8 DALI Ballasts
Minimum Load	N/A
Maximum Load	64 DALI ballasts
Standards	RoHS UKCA, CE EN 60669-2-5:2016
Communication	FM radio, 433.9MHz, DALI

Installation and Setup

For information on installing and setting up the RSR-DLI, see the [RSR-DLI Manual](#).



Document Version 2.0.0

telephone +44 (0) 1634 226666 | www.rakocontrols.com