

Datasheet

RMS-800

800W Switching Module

What is the RMS-800?

The RMS-800 is a wireless switching module suitable for use with non-dimmable loads such as:


- Non-dimmable lighting
- Fans
- Pumps
- Contactors

The RMS800 can be controlled by any Rako transmitter such as RCM, RNC, RK-EOS or RK-MOD keypads, handhelds and HUB units.

Features

- Up to 16 custom Scenes
- Keypad or software programmable
- LED diagnostic feedback
- Manual test/programming button

Connections/Dimensions

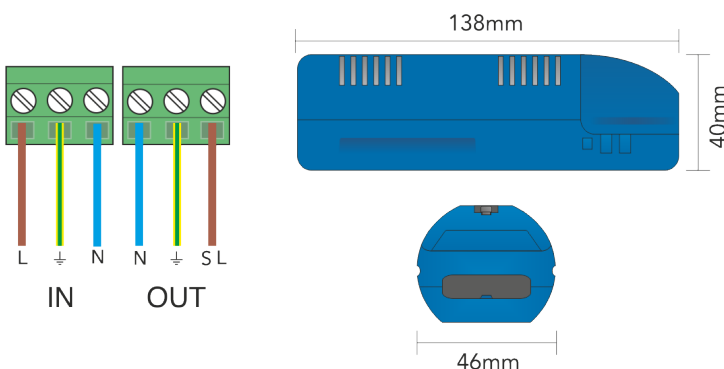

Technical Data

| | |
|---------------|--|
| Dimensions | 138x46x40mm |
| Input Supply | 230V AC 50Hz, |
| Weight | 205g |
| Housing | UL94-V0 |
| Connections | Input: 3-way screw terminal Output: 3-way screw terminal |
| Climate Range | Temperature +2C to +40C Humidity +5% to 95% non-condensing |
| Load Types | Non-dimmable mains lighting, Fans, Pumps, Contactors |
| Minimum Load | N/A |
| Maximum Load | 800W |
| Terminal Size | 4.0mm ² |
| Standards | RoHS UKCA, CE EN 60669-2-5:2016 |
| Communication | FM radio, 433.9MHz |

Installation and Setup

For information on installing and setting up the RMS-800, see the [RMS-800 Manual](#).



Document Version 2.0.0

telephone +44 (0) 1634 226666 | www.rakocontrols.com

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.

© 2024 RAKO CONTROLS LIMITED