




Datasheet

WP-CON

Backbox RJ11 to Punchdown connector.

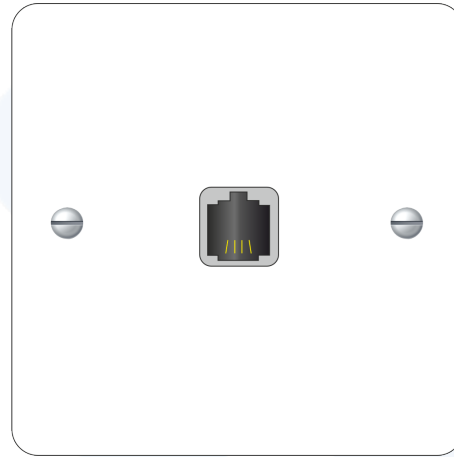

What is the WP-CON?


The WP-CON unit is mounted on a standard 86mm² plate with 2 screw fixings to fit a standard 35mm deep single gang UK backbox.

The WP-CON provides a punch down connection to the Rako wired network and an RJ11 socket for plug in connection of wired devices.


The WP-CON is compatible with:

- WSR-DMX
- WSR-DLI
- WMR-DLI
- WK-HUB
- WLED150
- WLED75
- WLED30
- WK-PIR
- WRB-100

Connections/Dimensions



2 x Krone connectors for RACOM data termination. (CAT 5 cable)

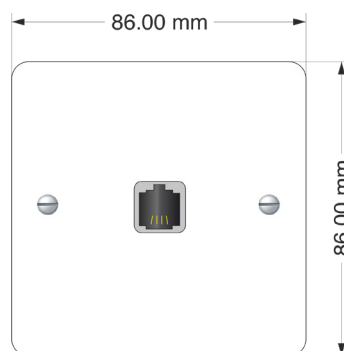

Technical Data

Dimensions	86x86x25mm
Fixing	Standard UK single back box, minimum 35mm depth, 47mm advised
Weight	30g
Input Supply	12-18V DC from Rako wired network
Connections	8-way krone connector RJ11 port
Climate Range	Temperature +2C to +40C Humidity +5% to 95% non-condensing
Cable type	UTP CAT5e, CAT6, RJ11
Standards	RoHS UKCA, CE EN 60669-2-5:2016
Communication	CAN

Installation and Setup

For information on installing and setting up the WP-CON, see the [WP-CON Manual](#).



Document Version 2.0.0

telephone +44 (0) 1634 226666 | www.rakocontrols.com

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.

© 2024 RAKO CONTROLS LIMITED