



# Datasheet

## DIN-DLI

Multi-Room DALI Controller




### Overview

The DIN-DLI is a multi-room DALI controller designed for use in a DALI addressable network. Its Room grouping feature allows up to 64 ballasts to be grouped, with a maximum of 16 Rooms.

Once configured in Rasoft Pro, the DIN-DLI can be controlled from the Rako Wired Network using Rako wired controllers such as the WCM, WK-EOS, WK-MOD, WK-PIR, WAVFR, and WAVMI. When paired with compatible DT6 or DT8 ballasts, the DIN-DLI supports RGBW and colour-tunable LED control.


### Connections

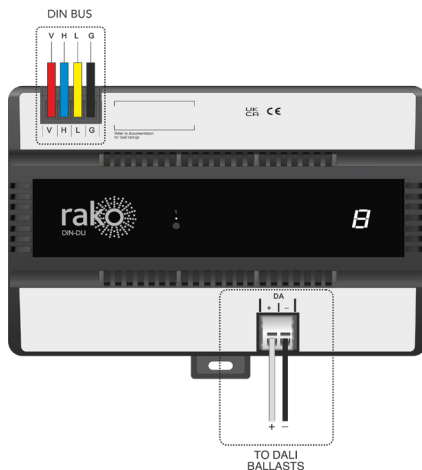

9.00 mm

Use ferrules matching the appropriate cable size.

### Dimensions

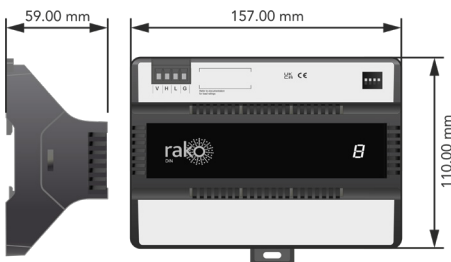

### Installation and Setup

For information on installing and setting up the DIN-DLI, see the [Instruction Manual](#).

### Specifications

#### Mechanical

Dimensions	W157xH110xD59mm Width = 9 DIN Modules
Weight	210g
Mounting	Top Hat DIN Rail IEC/EN 60715
Vertical Clearance	150mm
Cable Size	DIN Bus - 0.5–1.5mm <sup>2</sup> (20–15 AWG) DALI - 1.0–2.5mm <sup>2</sup> (17–13 AWG)
Terminals	DIN Bus - 4 way screw terminal DALI Output - Push terminal

#### Electrical

DALI Power Source	Via DIN bus
Load Types	DT6 Ballasts DT8 Ballasts (RGBWAF/Tc)
Maximum Load	64 Ballasts 128mA
Certification & Standards	RoHS UKCA, CE EN 60669-2-5
Communication	DIN Bus (DPU Usage: 16) DALI

#### Environmental

Operating Temperature	+2 °C to +40 °C
Climate Range	Temperature +2C to +40C Humidity +5% to 90% non condensing



Document Version 1.0.0

telephone +44 (0) 1634 226666 | [www.rakocontrols.com](http://www.rakocontrols.com)

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HERewith WITHOUT NOTICE.  
© 2025 RAKO CONTROLS LIMITED