Datasheet

RAK-STAR

16-Way Connection Unit




What is the RAK-STAR?

The RAK-STAR is a 16-way distribution board for centrally run CAT5 or CAT6 wiring. The RAK-STAR has no internal power supply as this is supplied by a connected RAK-LINK.

The RAK-STAR is used when there are more than two centrally run cables in a single location. There can be multiple RAK-STARs in a system.


Dimensions

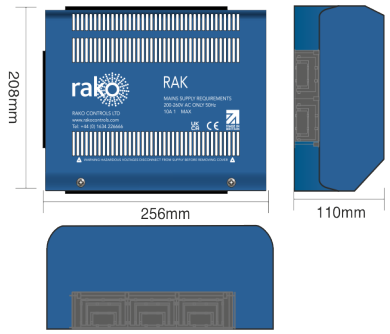

Technical Data

Dimensions	193x253x110mm
Input Supply	15V DC via the RAK-LINK
Connections	18 x 8-way Krone connectors
Housing	Powder-coated galvanised steel
Weight	3Kg
Climate Range	Temperature +2C to +40C Humidity +5% to 95% non-condensing
Cable types	CAT5e, CAT6
Terminals	Krone punch-down
Cable entry	Multiple knockouts on top, bottom, side and rear
Standards	RoHS UKCA, CE EN 60669-2-5:2016
Communication	CAN Bus

Connections

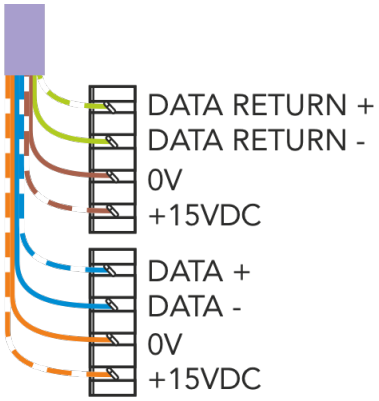

Installation and Setup

For information on installing and setting up the RAK-STAR, see the **RAK-STAR Manual.**

Document Version 2.0.1

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.
© 2026 RAKO CONTROLS LIMITED